DURATION

Door Restrictors



The Duration range of door restrictors provides a simple and effective solution for controlling door movement, helping to limit the opening angle to a maximum of 90°.

Designed for easy installation within the Eurogroove, the range includes the SLDR restrictor for most PVC-U profiles and the R10 restrictor for aluminium doors, providing a practical solution across a wide range of applications.

Features


- Adjustable opening aperture up to a maximum of 90°.
- Easy installation into the Eurogroove.
- SLDR suitable for most PVC-U profiles.
- R10 suitable for aluminium applications.
- Tested to 100,000 cycles for proven durability.
- SLDR manufactured from aluminium and stainless steel.
- R10 manufactured from stainless steel.
- Grade 4 corrosion resistance in accordance with BS EN 1670:1998.


DURATION

Maintenance

To maintain appearance and performance, external hardware should be cleaned routinely and moving parts lightly lubricated at least twice a year.

Products installed within one mile of coastal areas, building sites or large industrial areas will require more frequent cleaning to help prevent the build-up of corrosive contaminants.

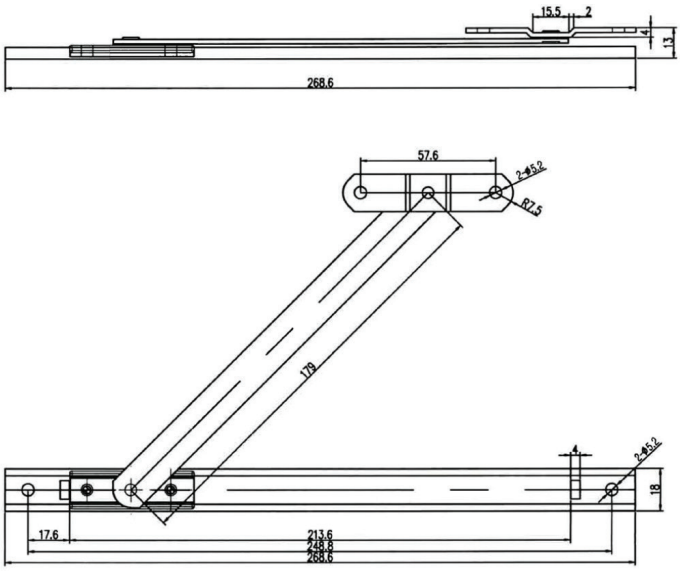

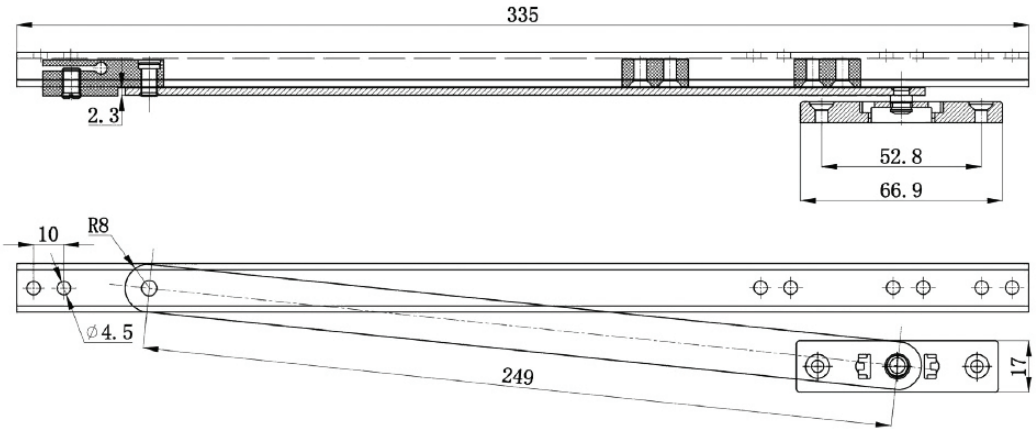

Secured by Design
SBD
Police Preferred Specification

FERRITIC 430 STAINLESS STEEL
10 YEAR
MECHANICAL GUARANTEE

AUSTENITIC 304 STAINLESS STEEL
25 YEAR
MECHANICAL GUARANTEE

Scan for more information.

Designed by and exclusive to Total Hardware
www.totalhardwareltd.co.uk

Total Hardware